MINITRIM 62 CITIZEN LED

Standard colour temperatures: 2700K, 3000K, 4000K, colour rendering Ra >80 and >90 2-3 step Macadam are all available.

Life 50000 hours.
A choice of drivers provide fixed supply or dimming to project requirements. IP20 durable, high specification diecast construction, colour powder coat finish provides longevity.

Built to conform to the requirements of BS EN 60598-1 and IEC 598. The MINITRIM 62 spring mechanism makes installation easy.
Photometrically tested to LM-79-08 confirms MINITRIMs high performance.




MINITRM 62 FIXED Round recessed downlighter with no separate ceiling trim and a choice of deep cone reflector finish and beam distribution. The high-quality precision light controller with lens plus deep cone aluminium reflector gives visual comfort.

The MINITRIM 62 is easy to install and incorporates the latest, high efficiency LED technology. Colour consistency through life is ensured by state-of-the-art components and passive cooling aluminium heat sinks.





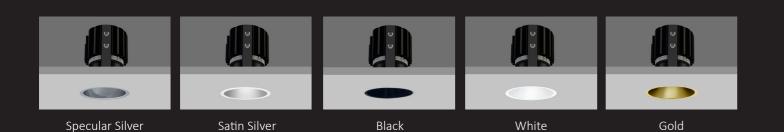

ight Source: High quality Citizen 2 and 3 step MacAdam

Up to 1300 lumens.

Colour Rendering: Excellent Colour rendering up to 93 CF

Colour Temperature: Warm 2700°K, 3000°K or 4000°K available for

cooler colour appearance if desired.

Longevity: 50,000 hrs L80

Reflector: Spectro Silver

Construction: Aluminium / Steel / Plastic

P Rating: IP20 (dry interior use).

Nounting: Recessed into ceiling.

Electrical Supply: 230v 50Hz. A plug and socket is provided for

he electrical connection.


Manufacture: Made in the UK



Exploded view

MINITRIM 62- Citizen LED

| | Spectro Silver | Satin Silver | Black | White | Gold |
|-----|----------------|--------------|-------|-------|-------|
| 46° | F8647 | F8642 | F8643 | F8644 | F8645 |

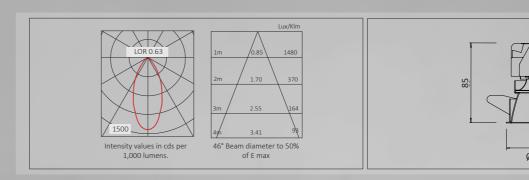











Cut-out Ø56.5 +0.5

DALI
1-10V
LEAD/TRAIL

Web Use Only

Designed Architectural Lighting www.dal-uk.com