




## CIVIC X102 - Xicato XIM with integral 48V PS

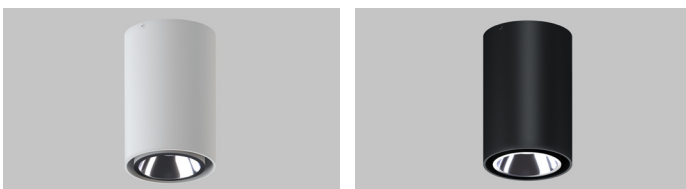

CIVIC X102 Surface mounted downlighter with deep cone specular silver reflector with a choice of beam distribution. CIVIC X102 finished in white or black. The high-quality precision light controller and deep deep cone aluminium reflector gives visual comfort. Integral 48V power supply. The CIVIC X102 is easy to install and incorporates the latest, high efficiency LED technology. Colour consistency through life is ensured by state-of-the-art components and passive cooling aluminium heat sinks. Standard colour temperatures: 2700K, 3000K, 4000K, colour rendering Ra >80 2 step Macadam are all available. Life 50000 hours. A choice of drivers provide fixed supply or DALI dimming. IP20 durable, high specification diecast construction, colour powder coat finish provides longevity. Built to conform to the requirements of BS EN 60598-1 and IEC 598.

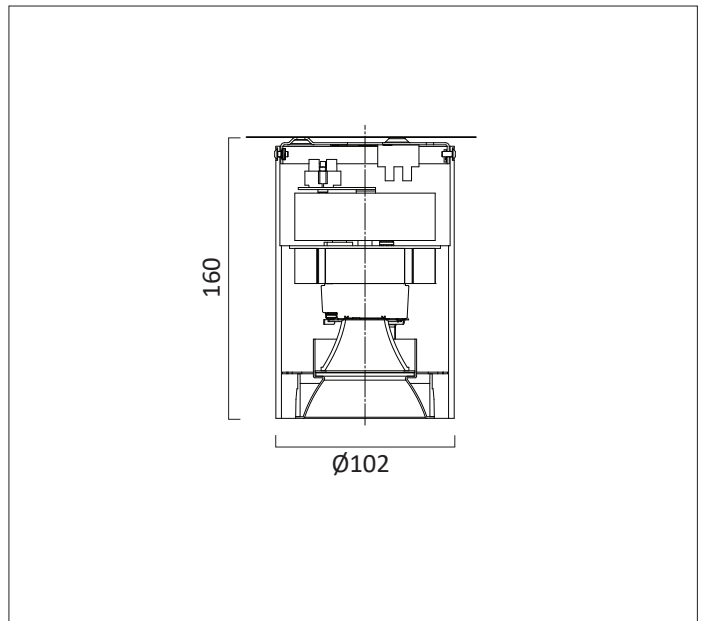


### WHITE CASING RAL 9010

IP20	Specular Silver Reflector
40°	<b>M3741</b>
60°	<b>M3761</b>

### BLACK CASING RAL 9005

IP20	Specular Silver Reflector
40°	<b>M3841</b>
60°	<b>M3861</b>





Xicato XIM LES19mm

Engine Order Code	Source Output (Lumens)	CCT	CRI	Pd (W)	Dimming Range
<b>20X2</b>	2000	2700K	80	18.2	100-1%
<b>20X4</b>	2000	3000K	80	18.2	100-1%
<b>20X5</b>	2000	4000K	80	18.2	100-1%

**DRIVERS**

Driver Order Code	
<b>10</b>	1-10V
<b>50</b>	DALI

**PHOTOMETRIC DATA**

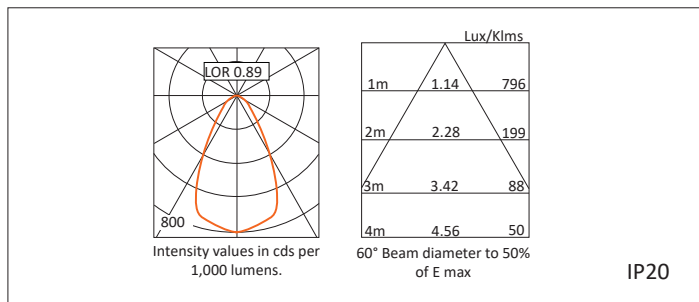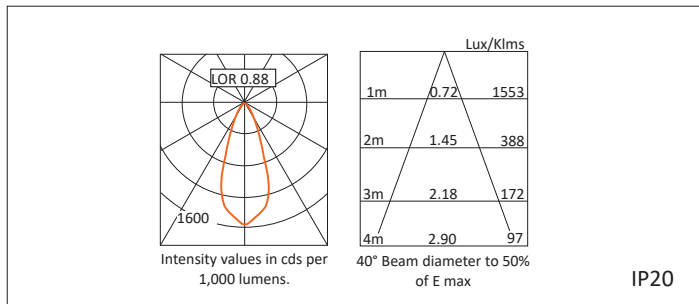

Full Product Number Example

**M374120X250**

**M37** Xicato LED- IP20

**4** 40°

**1** Specular Silver

**20** 2000 lumens

**X** CRI >80 - 2 Step MacAdam - XIM

**2** 2700K

**5** DALI

**0** No Emergency

Tolerance range for optical and electrical data: ±10 %.