


TRIMLESS AMBIANCE X80 SQUARE - Xicato XTM LED



TRIMLESS AMBIANCE X80 SQUARE FIXED recessed downlighter with no trim, designed for plaster skim ceilings with white or black deep reflector and a choice of beam distribution. Xicato LED.

The high-quality precision lens and deep reflector gives visual comfort. Driver mounted remotely.

The TRIMLESS AMBIANCE X80 SQUARE is easy to install and incorporates the latest, high efficiency LED technology.

Colour consistency through life is ensured by state-of-the-art components and passive cooling aluminium heat sinks.




Standard colour temperatures: 2700K, 3000K, 4000K, colour rendering Ra >80 or Ra>90 2-3 step Macadam are all available.

Life 50000 hours.

A choice of drivers provide fixed supply or dimming to project requirements. IP20 durable, high specification die-cast

construction, colour powder coat finish provides longevity. Built to conform to the requirements of BS EN 60598-1 and IEC 598.

Overall size 80 x 80 cut-out 95 x 95

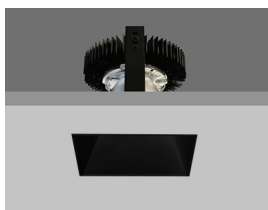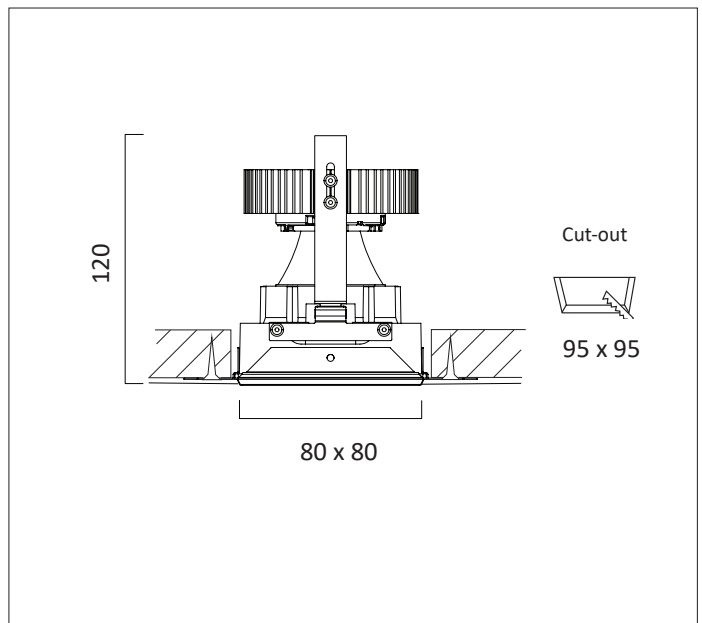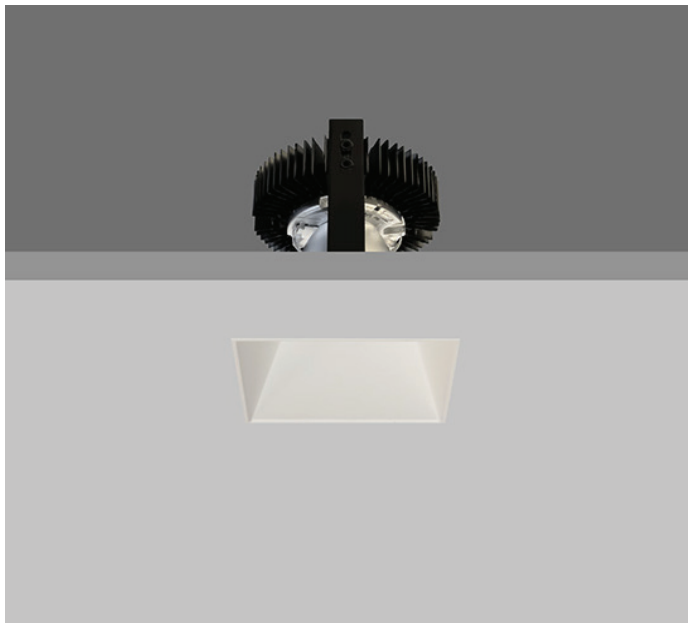


Black White

IP20

40° **F1143** **F1144**

50° **F1153** **F1154**




19mm XTM LIGHT ENGINE for 40° and 50° beam

Engine Order Code	Output (Lumens)	CCT	CRI	Pd (W)	Vf forward typical	Current
09A2	965	2700K	>80	6.6W	13.2	500 mA
13A2	1300	2700K	>80	9.5W	13.6	700 mA
14A2	1490	2700K	>80	10.6W	21.1	500 mA
20A2	2000	2700K	>80	15.2W	21.7	700 mA
09A3	965	3000K	>80	6.6W	13.2	500 mA
13A3	1300	3000K	>80	9.5W	13.6	700 mA
14A3	1490	3000K	>80	10.6W	21.1	500 mA
20A3	2000	3000K	>80	15.2W	21.7	700 mA
09A5	965	4000K	>80	6.6W	13.2	500 mA
13A5	1300	4000K	>80	9.5W	13.6	700 mA
14A5	1490	4000K	>80	10.6W	21.1	500 mA
20A5	2000	4000K	>80	15.2W	21.7	700 mA

Tolerance range for optical and electrical data: ±10 %.

DRIVERS & EMERGENCY





Driver Order Code

0	FIXED
1	1-10V
3	DSI
5	DALI
7	LEAD / TRAIL
9	ADDRESSABLE

Emergency Order Code

0	No emergency
E	3 hour maintained emergency pack
9E	with DALI Addressable with full error feed back

PHOTOMETRIC DATA

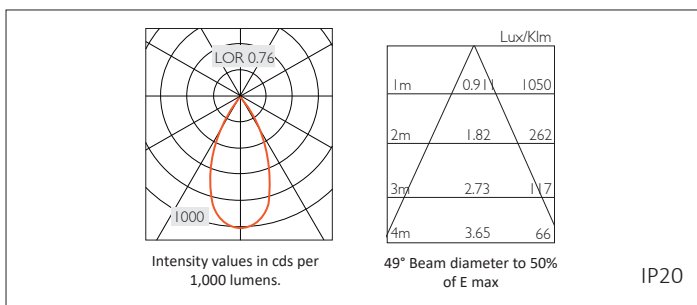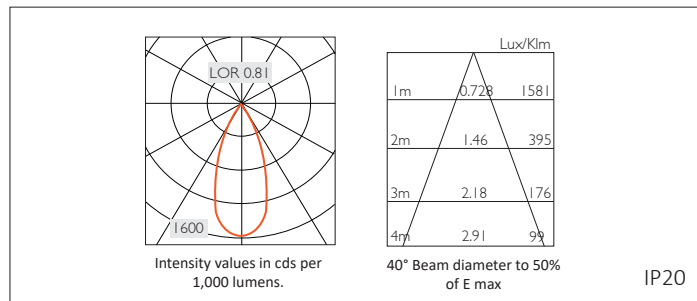

Full Product Number Example

F115313A210

F11 Trimless Ambiance X80 Square Fixed

5 49°

3 Black reflector

13 1300 lumens

A CRI >80 - 2-3 Step MacAdam Xicato XTM

2 2700K

1 1-10V dimming

0 No Emergency