



## AMBIANCE LI00 DIRECTIONAL


AMBIANCE L100 DIRECTIONAL Round recessed downlighter with standard white ceiling trim and a choice of deep cone reflector finish and beam distribution.

Overall diameter 100mm, cut out 90mm diameter.

3 Step MacAdam LED.

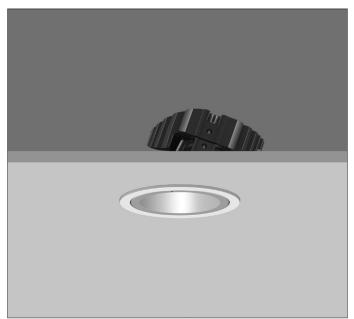

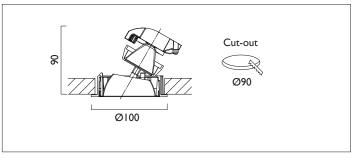

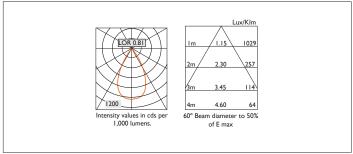

Product Number	C1162/*Engine
Lamp Type	3 Step MacAdam LED, Up to 1257 lumens
Reflector	Satin Silver
Beam Angle	60°
Construction	Aluminium / Steel
Ceiling Trim	White RAL 9010
IP	IP20
Control	Driver

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

\*Light Engine Specification 3 STEP MacADAM 50,000 hours >Ra80

090 \_ \_ 904 lm 6.2W 145lm/W 180mA 100 \_ \_ 1084 lm 7.8W 128lm/W 220mA 120 \_ \_ 1257 lm 9.3W 129lm/W 260mA 2700K 2 10 No Emergency

3000K 3 E Maintained Emergency
4000K 5 Fixed Non Dimmable
1 1-10V
5 DALI

-7 Lead / Trailing

-9 Addressable Inverter & Driver

Maintained Emergency

EN 60598-1 WEE/AE0290TY





Please note, different colour appearances (K) of LEDs have slightly different lumens outputs, so, using various manufacturers figures DAL quotes mean average lumens.