
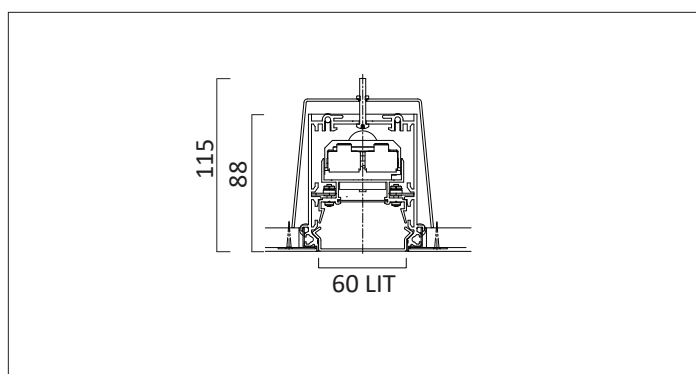


LIGHTLINE LED 60

LIGHTLINE LED 60 TRIMLESS is suitable for recess mounting in most ceiling types. It consists of an aluminium extruded profile with white RAL 9010 ceiling trim as individual modules in various chassis lengths, and comes complete with integral driver.

Optical control is provided by a clip in opal diffuser.

High Efficient LED. Small tolerance of MacAdam 3. Long life 72,000 hours.

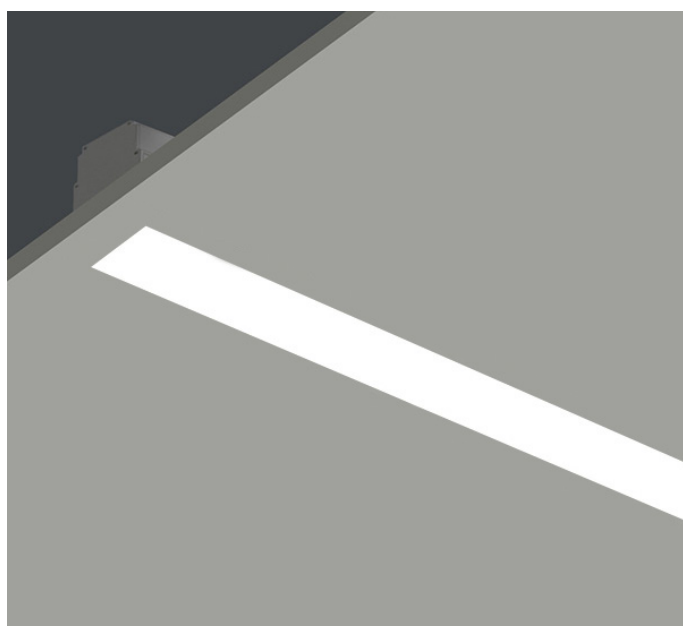

Construction	Aluminium / Steel / Plastic
Diffuser	Opal
IP	IP40
Control	Fixed, DALI, 1-10V

Product No	Length (mm)	Colour Temp	CRI	Source (Lm)	Wattage (W)	Current (mA)	System Efficacy (Lm/W)	Luminaire Efficacy (LLm/W)	Cut Out (mm)
L1802	570	3000K	>80	1170	7.2	300	162	98	83 x 580
L1803	850	3000K	>80	1755	10.8	300	162	98	83 x 860
L1804	1130	3000K	>80	2340	14.4	300	162	98	83 x 1140
L1805	1410	3000K	>80	2925	18.0	300	162	98	83 x 1420
L1806	1690	3000K	>80	3510	21.6	300	162	98	83 x 1700
L1902	570	4000K	>80	1220	7.2	300	170	102	83 x 580
L1903	850	4000K	>80	1830	10.8	300	170	102	83 x 860
L1904	1130	4000K	>80	2440	14.4	300	170	102	83 x 1140
L1905	1410	4000K	>80	3050	18.0	300	170	102	83 x 1420
L1906	1690	4000K	>80	3660	21.6	300	170	102	83 x 1700

Tolerance range for optical and electrical data: $\pm 10\%$.

Other outputs are available.