
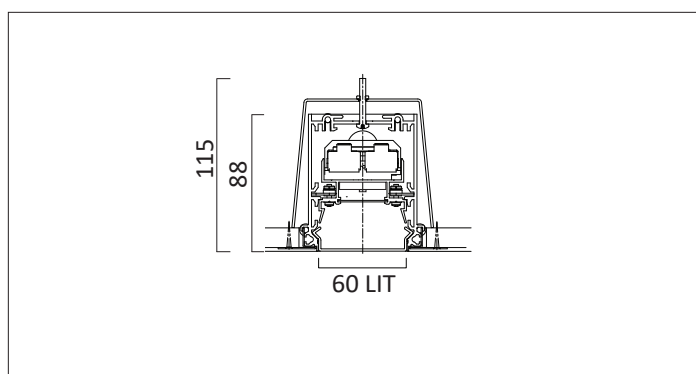


LIGHTLINE LED 60

LIGHTLINE LED 60 TRIMLESS is suitable for recess mounting in plasterboard ceiling. It consists of an aluminium extruded profile with white RAL 9010 ceiling trim as individual modules in various chassis lengths, and comes complete with integral driver.

Optical control is provided by a clip in opal diffuser.

High Output LED. Small tolerance of MacAdam 3. Long life 72,000 hours.

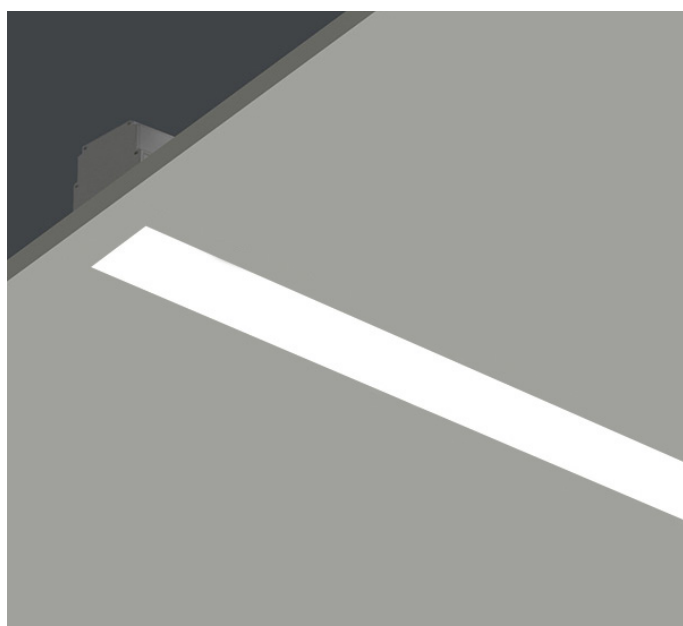

Construction	Aluminium / Steel / Plastic
Diffuser	Opal
IP	IP40
Control	Fixed, DALI, 1-10V

Product No	Length (mm)	Colour Temp	CRI	Source (Lm)	Wattage (W)	Current (mA)	System Efficacy (Lm/W)	Luminaire Efficacy (LLm/W)	Cut Out (mm)
L2002	570	3000K	>80	2260	13.2	300	162	98	83 x 580
L2003	850	3000K	>80	3390	19.8	300	162	98	83 x 860
L2004	1130	3000K	>80	4520	26.4	300	162	98	83 x 1140
L2005	1410	3000K	>80	5650	33.0	300	162	98	83 x 1420
L2006	1690	3000K	>80	6780	39.6	300	162	98	83 x 1700
L2102	570	4000K	>80	2340	13.2	300	170	102	83 x 580
L2103	850	4000K	>80	3510	19.8	300	170	102	83 x 860
L2104	1130	4000K	>80	4680	26.4	300	170	102	83 x 1140
L2105	1410	4000K	>80	5850	33.0	300	170	102	83 x 1420
L2106	1690	4000K	>80	7020	39.6	300	170	102	83 x 1700

Tolerance range for optical and electrical data: $\pm 10\%$.

Other outputs are available.