


MINIATURE SPOTLIGHT


MINIATURE SPOTLIGHT can be surface / track mounted or be designed to be incorporated into the 'DAL Pro Art Picture Light'. It has a small $\varnothing 32$ mm diameter housing that can be fully adjusted to 0-90° vertical / 0-350° horizontal. Available in various beam distribution, spot, medium, flood and also elliptical. It is constructed in high quality extruded aluminium, steel and plastic with durable powder coat white painted finish RAL 9010 as standard. Remote driver that can run more than one pair of spotlights which can be located near a the fitting to maintain it's minimalistic appearance.

It has the latest high output LED technology, high efficiency and excellent colour consistency. It has a special designed heat-sink which is passive, to disperse the heat from the LED which ensures the maximum operational life.

Standard colour temperatures: 3000K, 4000K (as standard) colour rendering Ra 90+, 2-3 step Macadam. Life 50000 hours (minimum). Available with fixed non dimmable driver or DALI / 1-10V dimmable driver. IP20 construction. Built to conform to the requirements of BS EN 60598-1 and IEC 598.

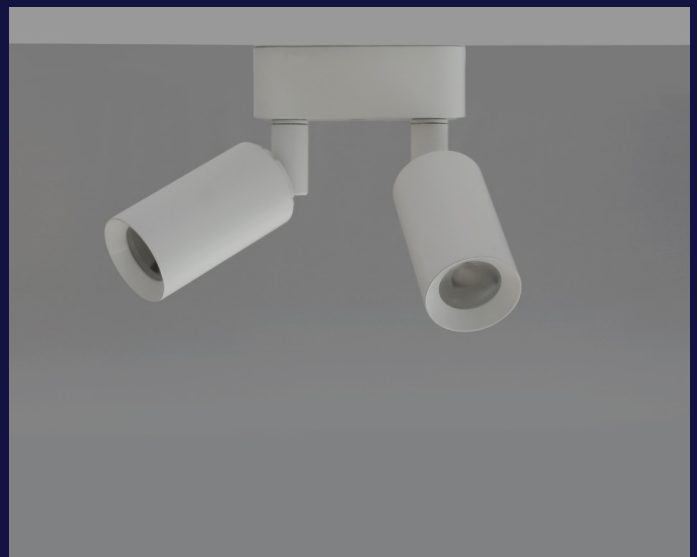

Typical Dimensions

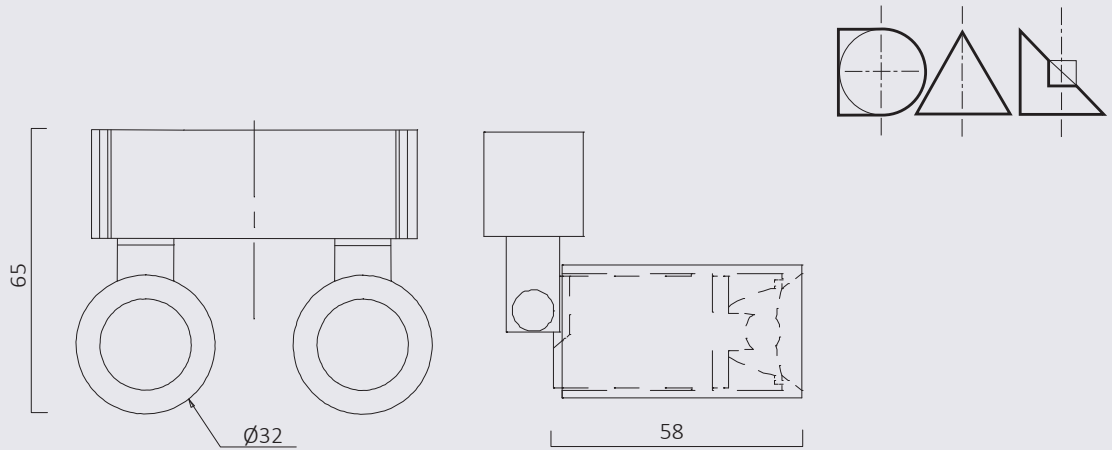

Product No.	Distribution	No. of Spotlights	CCT	CRI	Typical Initial Lumens
A7090/1/S	Spot / Medium / Flood / Elliptical	Twin	3000 K	90+	2 x 758 lm
A7090/2/S	Spot / Medium / Flood / Elliptical	Twin	4000 K	90+	2 x 800 lm

- | | | | |
|-------------------|--|--------------------------|---|
| Light Source: | High quality LEDs | Standard Painted Finish: | White RAL 9010 |
| Colour Rendering: | Excellent CRI > 90 (other CRI available on request). | Optical Performance: | Engineered diffuser controls the distribution resulting in an even distribution and appearance. |
| Colour Temp: | 3000K or 4000K (other CCT available on request). | Construction: | IP20 (dry interior use). |
| Longevity: | 50,000 hrs L80.(min) | Mounting Type: | Various- Please contact us for further details. |
| Light Control: | Remote Driver- Fixed, DALI or 1-10V | Electrical Supply: | 230v 50/60Hz |
| Construction: | Extruded aluminium construction. | | |

www.dal-uk.com

