
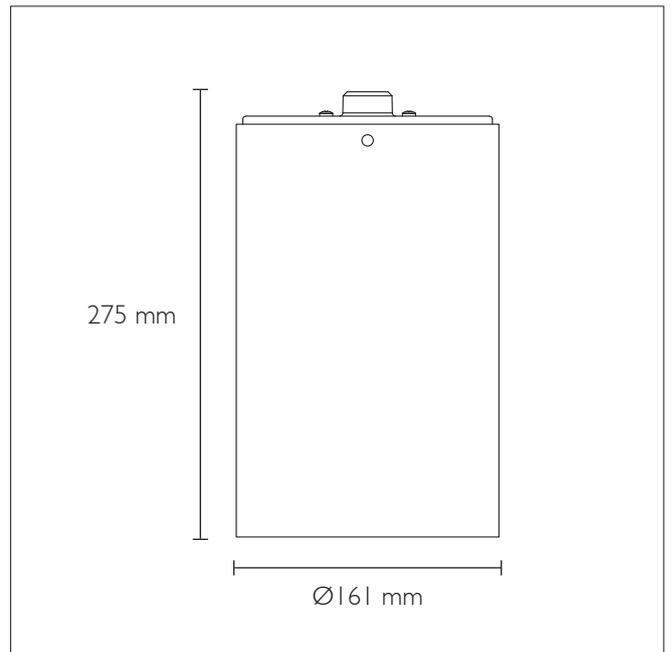


CIVIC I 61 FIXED IP65

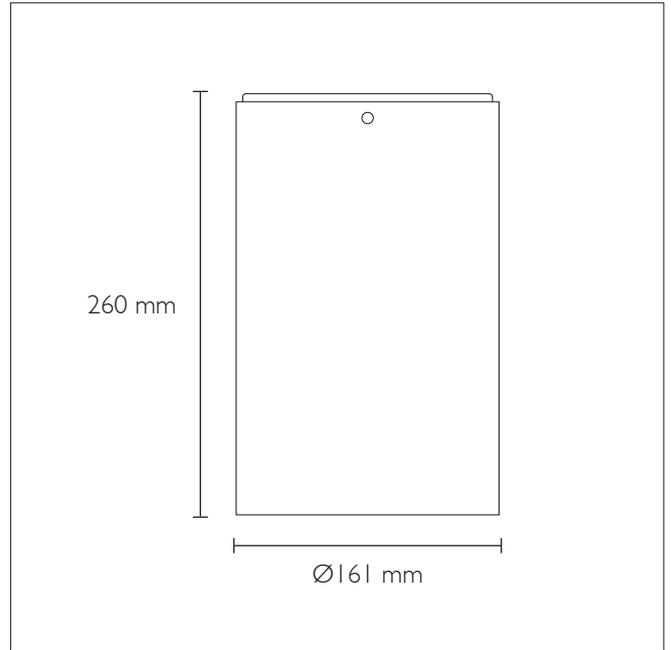





STANDARD MODULE - 19° / 25° / 37° / 50° Beam

CREE Lighting Engine - CRI 90, 2-Step MacAdam

2700K / 3000K / 4000K

| Source Lumens | System Wattage | Delivered Lumens | Efficacy (LOR 78%) | Delivered Lumens | Efficacy (LOR 87%) | Delivered Lumens | Efficacy (LOR 88%) | Delivered Lumen | Efficacy (LOR 85%) |
|---------------|----------------|------------------|--------------------|------------------|--------------------|------------------|--------------------|-----------------|--------------------|
| | | 19° | | 25° | | 37° | | 50° | |
| 2380 lm | 19.7 W | 1866 lm | 94 lm/W | 2071 lm | 105 lm/W | 2094 lm | 106 lm/W | 2023 lm | 102 lm/W |
| 2780 lm | 24.0 W | 2180 lm | 90 lm/W | 2419 lm | 100 lm/W | 2446 lm | 101 lm/W | 2363 lm | 98 lm/W |
| 3160 lm | 28.5 W | 2478 lm | 86 lm/W | 2749 lm | 96 lm/W | 2781 lm | 97 lm/W | 2686 lm | 94 lm/W |

Tested with CREE 3000K (System: 28.5 W / 700 mA)

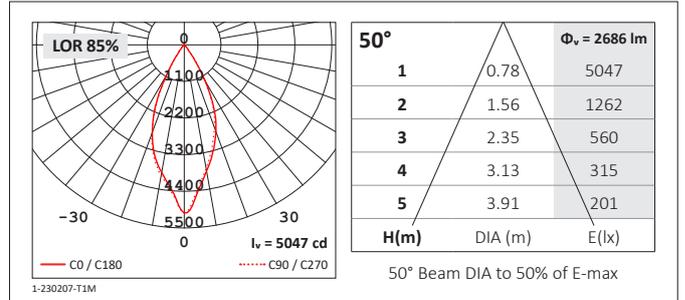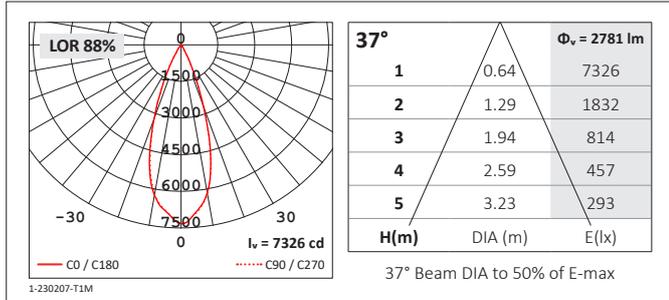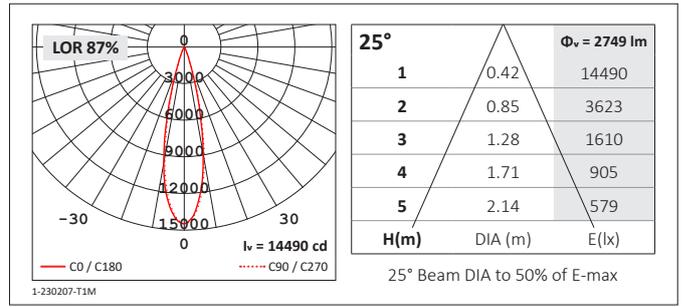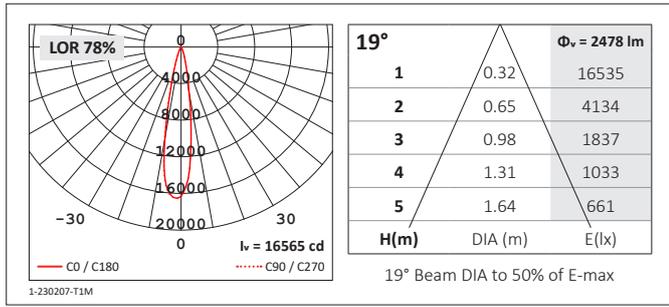

BODY / REFLECTOR COLOUR



White



Black



Grey

PRODUCT CODING EXAMPLE - M414323J550

| Series | Beam | Reflector Colour | Source Lumens | LED | CCT | Driver Protocol | Emergency Protocol |
|------------------|----------|------------------|---------------|----------|----------|-----------------|--------------------|
| M40 White Casing | 1 19° | 1 Specular | 23 2380 lm | J Cree | 5 2700K | 5 DALI | 0 None |
| M41 Black Casing | 2 25° | 2 Satin Silver | 27 2780 lm | | | | |
| M42 Grey Casing | 3 37° | 3 Black | 31 3160 lm | | | | |
| | 4 50° | 4 White | | | | | |
| F41 | 4 | 3 | 23 | J | 5 | 5 | 0 |

- CRI 98 CREE Lighting engine is available on request
- Tolerance range for optical and electrical data shown in this datasheet: ±5%