


CIVIC 65 FIXED

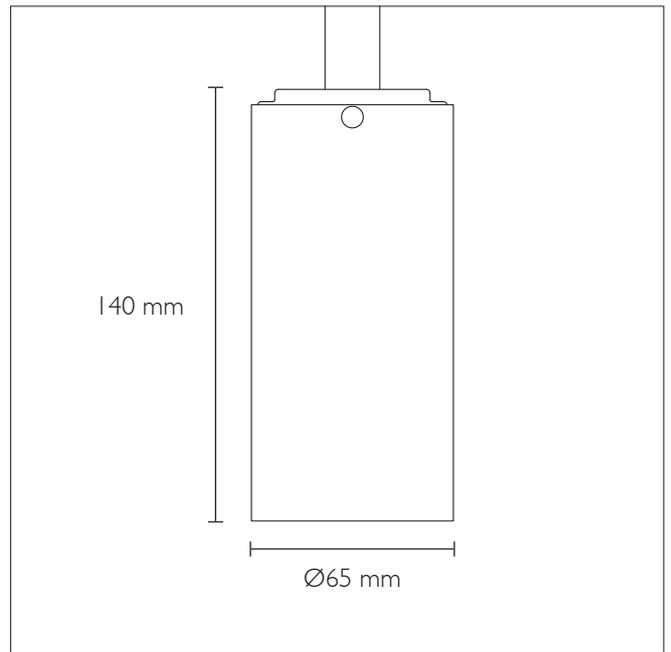





STANDARD MODULE - 19° / 25° / 37° / 50° Beam

CREE Lighting Engine - CRI 90, 2-Step MacAdam

2700K / 3000K / 4000K

Source Lumens	System Wattage	Delivered Lumens	Efficacy (LOR 75%)	Delivered Lumens	Efficacy (LOR 86%)	Delivered Lumens	Efficacy (LOR 85%)	Delivered Lumen	Efficacy (LOR 82%)
		19°		25°		37°		50°	
1000 lm	8.6 W	750 lm	87 lm/W	860 lm	100 lm/W	850 lm	98 lm/W	820 lm	95 lm/W
1260 lm	9.4 W	945 lm	100 lm/W	1084 lm	115 lm/W	1071 lm	113 lm/W	1033 lm	109 lm/W
1500 lm	11.4 W	1125 lm	98 lm/W	1290 lm	113 lm/W	1275 lm	111 lm/W	1230 lm	107 lm/W

Tested with CREE 3000K (System: 11.4 W / 300 mA)

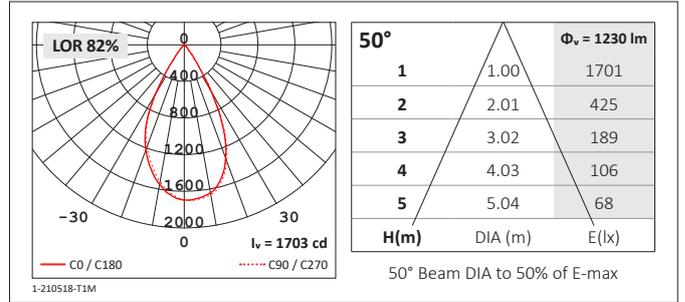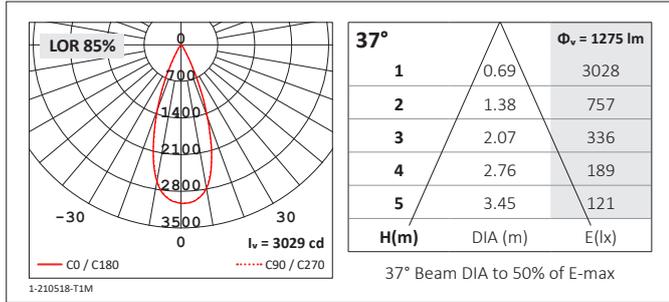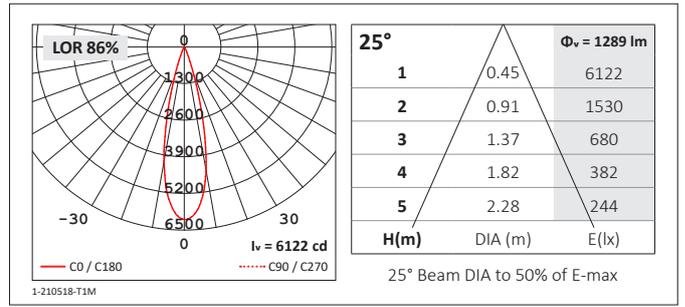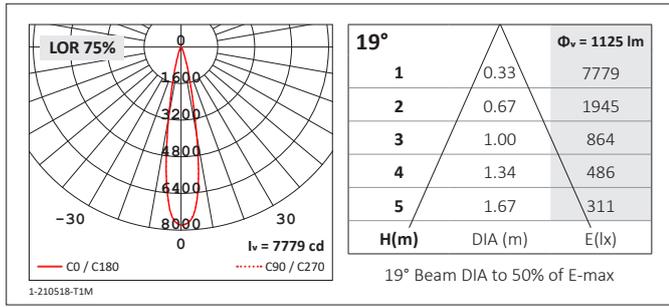

BODY COLOUR



White



Black

PRODUCT CODING EXAMPLE - C2S3315J550N320

Series	Mounting	Beam	Reflector Colour	Source Lumens	LED	CCT	Driver Protocol	Emergency Protocol	Driver Location	Casing Colour	IP	Accessories
C2	S Surface	1 19°	1 Specular Silver	10 1000 lm	J Cree	2 2700K	0 Fixed	0 None	N Integral	3 Black	2 IP20	0 None
Civic 65	P Rod	2 25°	2 Satin Silver	12 1260 lm	Ra90	3 3000K	1 I-10V	E Emergency	R Remote	4 White	4 IP44	1 Honeycomb
Fixed	Pendant	3 37°	3 Black	15 1500 lm		5 4000K	5 DALI	N Non-maintained			5 IP54	2 Elliptical Film
	W Wire	5 50°	4 White				7 Lead / Trail				6 IP65	3 Frosted Glass
	Suspended	S Single	5 Gold				9 Addressable					
	M Wall Mount	Wallwash	8 Spectro Silver									
C2	S	3	3	15	J	5	5	0	N	3	2	0

- CRI 98 CREE Lighting engine is available on request
- Tolerance range for optical and electrical data shown in this datasheet: ±5%